


Reception sensitivity test


Laser: LTI COMPACT

Distance: 60 meters

Angle: 0 deg.

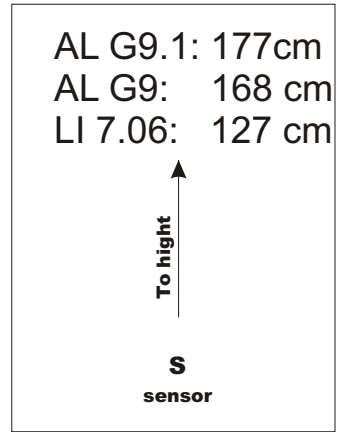

Area of coverage is shown on the picture:

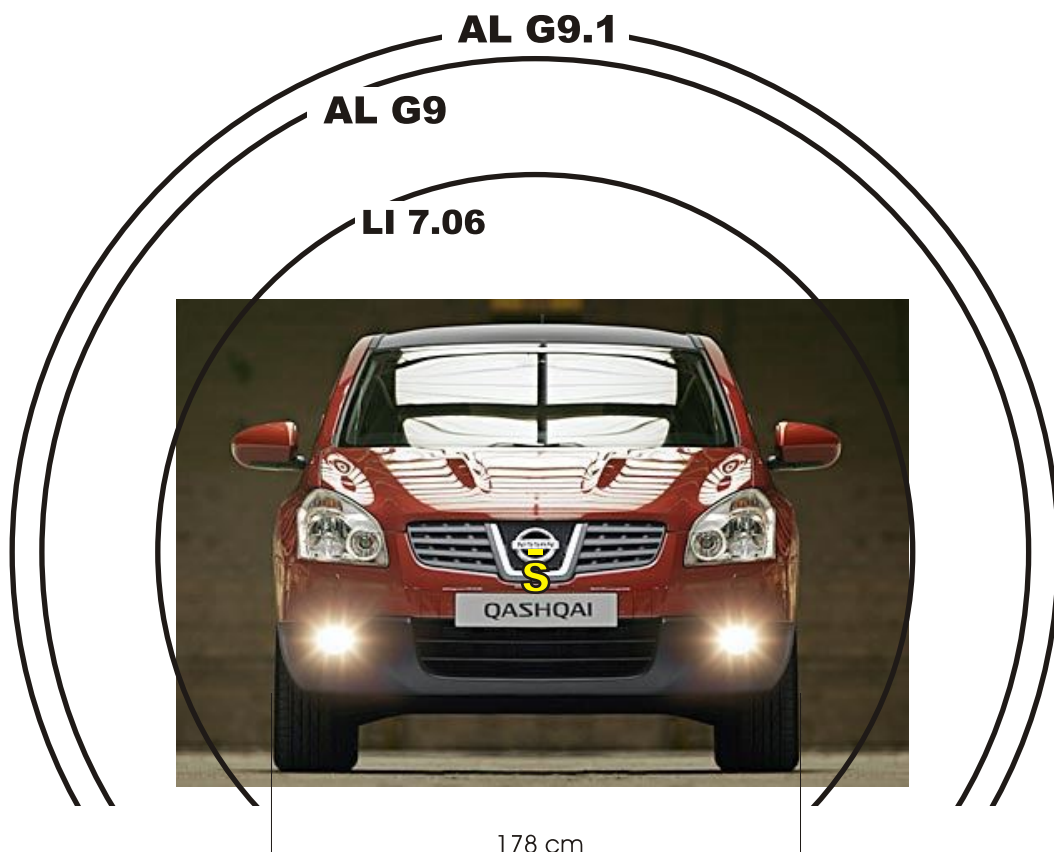


Test performed at 21h (night - when all units give their best performance), Temp. 14 deg.

Reception sensitivity test


Laser: LTI COMPACT

Distance: 120 meters

Angle: 0 deg.

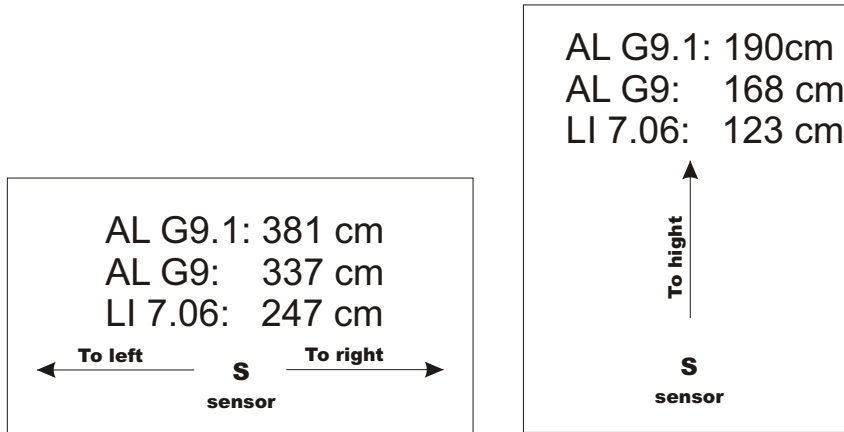

Area of coverage is shown on the picture:

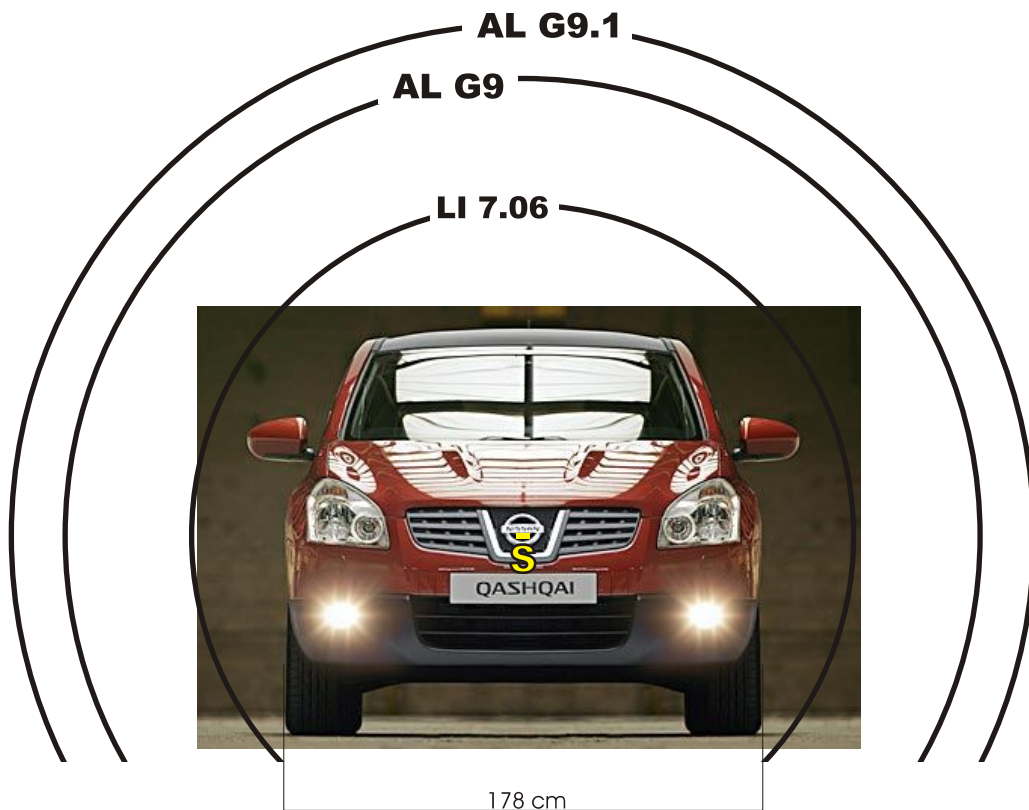


Test performed at 21h (night - when all units give their best performance), Temp. 14 deg.

Reception sensitivity test - ANGLE SHOT

Laser: LTI COMPACT


Distance: 60 meters

Angle: 10 deg.

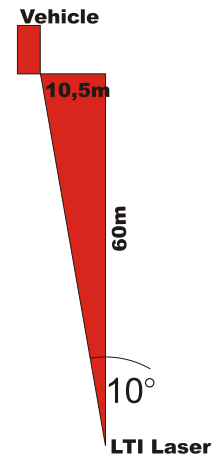


Reception of horizontally installed sensor

Sensor to sensor comparison

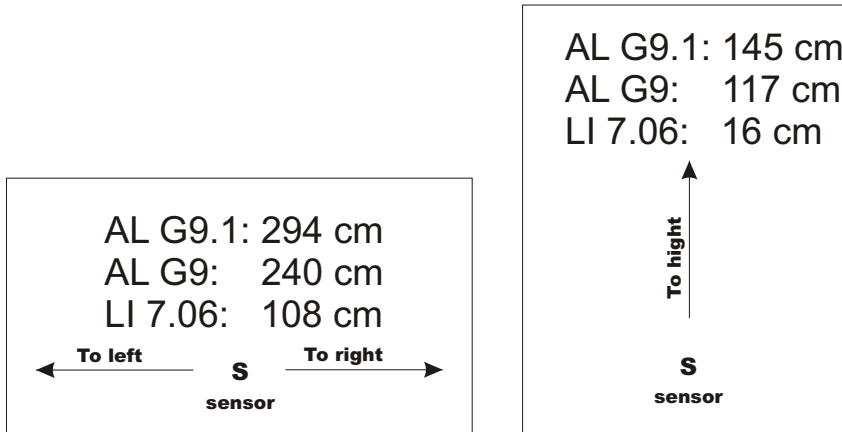

Area of coverage is shown on the picture:

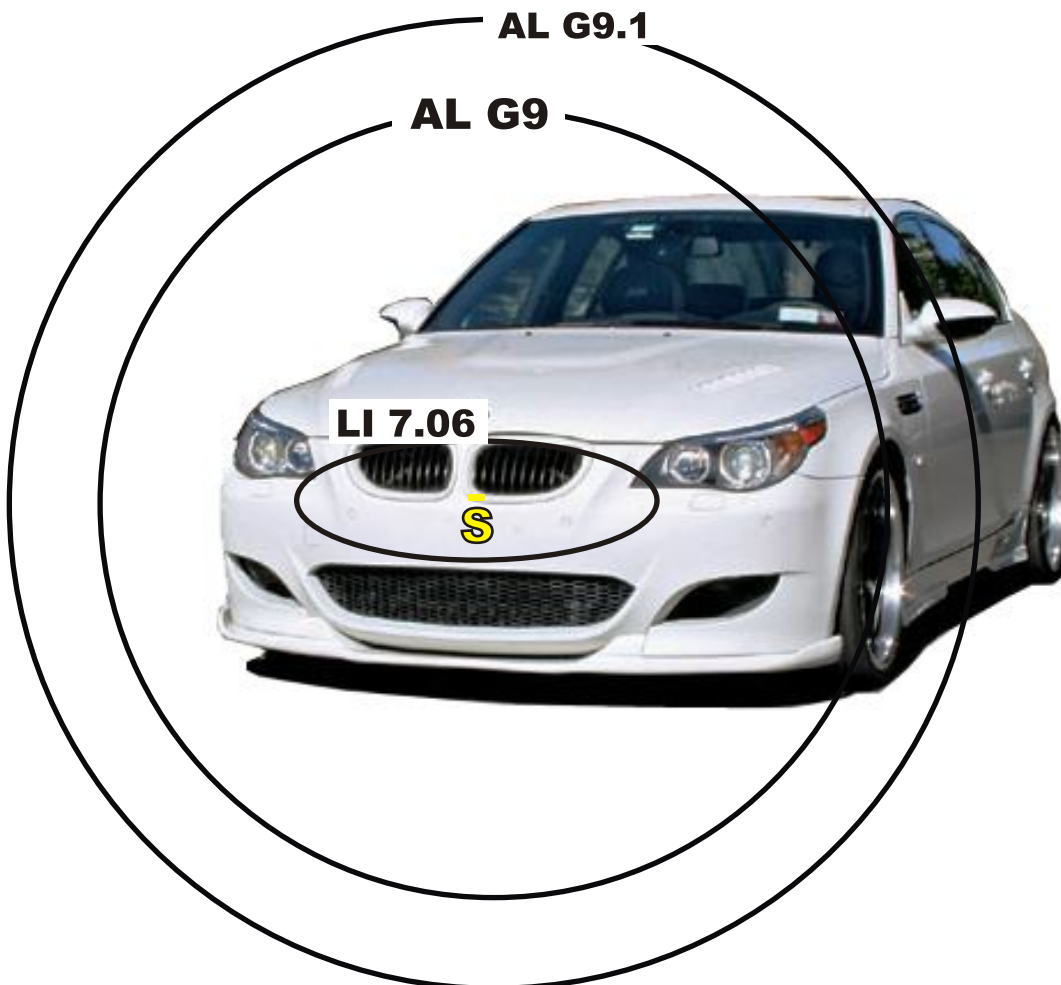

Test performed at 21h (night - when all units give their best performance), Temp. 14 deg.

Reception sensitivity test - ANGLE SHOT



Laser: LTI COMPACT

Distance: 60 meters


Angle: 10 deg.

Reception of horizontally installed sensor

AL Single to LI Dual comparison

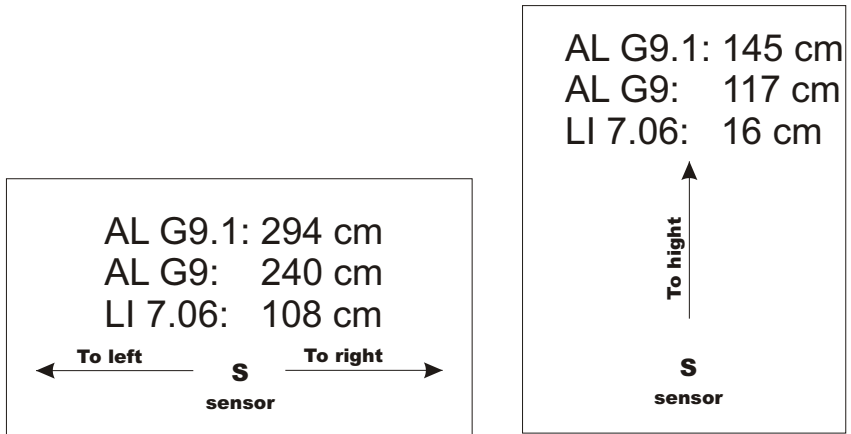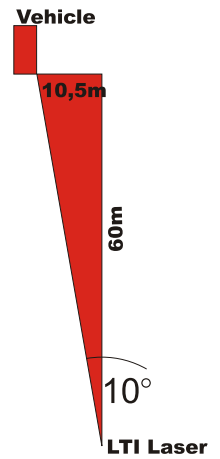

Area of coverage is shown on the picture:

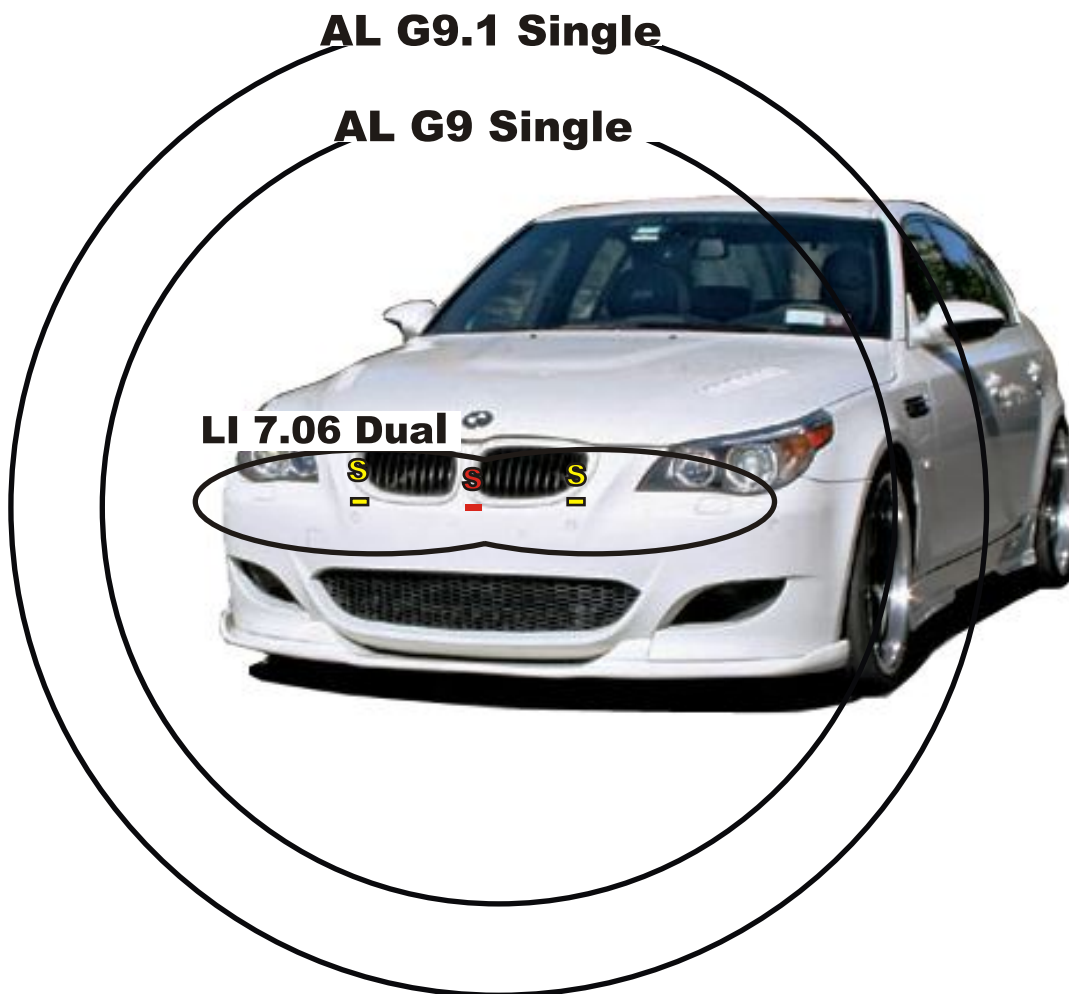


Test performed at 21h (night - when all units give their best performance), Temp. 14 deg.

Reception sensitivity test - ANGLE SHOT

Laser: LTI COMPACT

Distance: 60 meters

Angle: 10 deg.

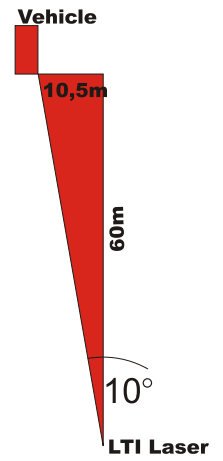

When sensor is vertically installed

Sensor to sensor comparison

